

NEUTRAL AND SOLVENT FREE POWERFULL STRIPPER FOR
FAÇADE PAINT, SAFE TO USE

Application

DECAMUR is a new developed stripper which is particularly suited to remove paint of facades. In contrast to the most paint strippers, this product is water-based and completely free of solvents. **DECAMUR** is in such a way safe to use that it can be sprayed airless. The product is likewise to be used inside without any danger. **DECAMUR** can be used to remove water-based paints and emulsion paints on brick, natural stone, bluestone, marble, concrete, Not suitable for mineral paints for example such as lime paint.

Product description

DECAMUR is a biologic degradable thixotropic liquid that applies perfectly on vertical surfaces. In contrast to most current strippers, **DECAMUR** is water-based and completely free of solvents. This is why **DECAMUR** barely or not evaporates and that the effectiveness on the paint layers is longer. In such a way **DECAMUR** is much more efficient and has a lower consumption. The treated paint layers can be easily rinsed off with steam or water under high pressure.

Characteristics and properties

Physical condition and color	thixotropic, white
Viscosity	> 1000 cps
Smell	negligible
Boiling point	> 100 °C
Flash point	/
pH	8,5 +/- 0,5
Solubility in water	completely
Density	+/- 1,6

Directions

Preparation

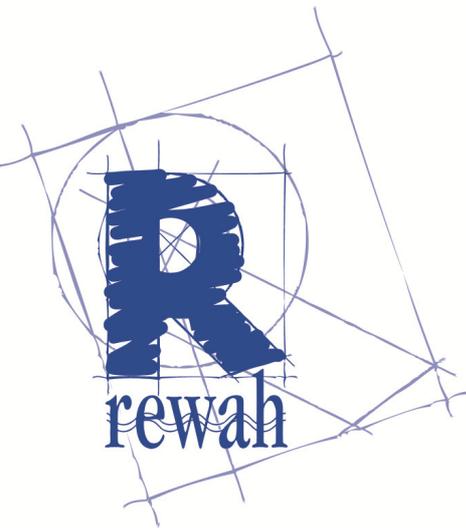
The elements which can't be stripped (windows, glass, ...) must be well protected with an adapted foil or tape. We advise to test the product preliminary to evaluate the effectiveness of the product. Not to be processed in case of temperatures below 10 °C.

Work method

DECAMUR is applied non-diluted by using an airless, a brush or a roller. After 10 minutes the effectiveness of **DECAMUR** is visible on the paint layer. It is advised to try to scrape the paint off after 30 minutes to evaluate if the paint easily comes loose of the base. In case this is not possible, it is advised to place an additional layer and try again to scrape the paint off. One hour after applying **DECAMUR** and if it was possible to scrape the paint off, the façade can be cleaned with water under high pressure (120 Bar) or with steam.

Safety information – Transport – Handling and storage - Waste

Consult the most recent and product-related safety information sheet from Rewah in compliance with the (EU) 453/2010 annex II/A guidelines. The information on the abovementioned safety information sheet has been drawn up with the greatest care and is based on the knowledge available at the date of issue. We accept no liability for damage or hindrance of any kind which could be caused by the use of the product concerned.

**Quantity to use**

0,15 – 0,25 ltr/m² = 4 – 8 m²/ltr

Packaging

5 ltr

Transport and storage

Transport and store away from frost. Protect the product and its packaging against direct sunlight. Avoid storage at temperatures >30°C.

Storage life

1 year after manufacturing in the original closed packaging.

Considerations

The data included in this sheet, the application advices and other recommendations are based on extensive research and experience. They are however not binding also in relation to third party liability. They do not protect the customer against checking the products and directions for their suitability for the purpose. The characteristics and properties described are average values and analyses registered at 20°C, variances are tolerated. Our customer service will gladly answer your questions. The rewrite of this sheet replaces all previous sheets.