

POWERFUL, FAST-ACTING PAINT STRIPPER FOR OUTDOOR USE,  
METHYLENE CHLORIDE-FREE

## Application

**DECASTRIP MAX** removes layers of paint from wood, stone, metal, etc. It enables you to strip away coats of paint made from a wide range of ingredients, such as latex, acrylate, oil, cellulose, alkyd, chlorinated rubber, polyurethane and epoxy. **DECASTRIP MAX** can also be used for removing adhesives, tags and graffiti.

## Product description

**DECASTRIP MAX** is a thixotropic product, made from a blend of solvents and softening agents. It provides excellent adherence on vertical/horizontal surfaces and can be easily rinsed away with water. It is characterised by its rapid action. It does not contain any alkalis, acids or phenols and therefore does not attack metals.

## Characteristics and properties

Physical condition	highly viscous
pH	neutral
Density	0,99
Flash point	5 °C

## Directions

### Preparation

You will need to protect any areas that you do not wish to strip (windows, glazing, elastic joints, etc.) using a suitable film and tape. The surface must be dry and free of oil and grease. Before starting work, you should test the product on the surface and assess the results obtained. The minimum ambient and contact temperature on the surface to be stripped should be at least 5 °C.

### Work method

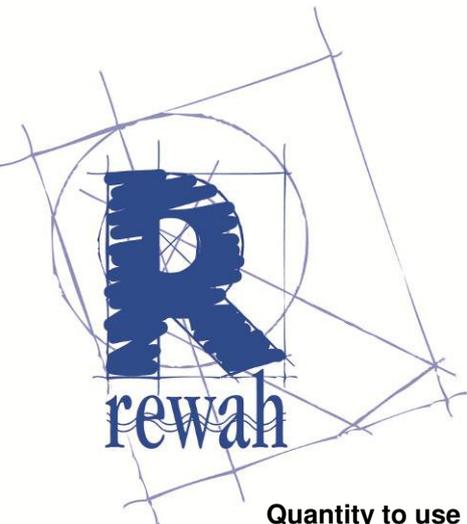
**DECASTRIP MAX** should be applied undiluted in a thick coat, using a brush or roller. Depending on the type of paint, wait 5 - 15 minutes until the paint layers begin to swell and dissolve. Then remove these layers using a scraper or high-pressure water spray. In case of difficulties when removing the paint layers, we advise to clean by steam (make a test!). In some cases, for example when removing several layers of paint, it may be necessary to repeat this step. In all cases, it is always necessary to thoroughly rinse the surface before application, so that the latter is properly clean and free of any residues of **DECASTRIP MAX**, so that a new coat of paint can be applied without any problems.

### Warning

Avoid applying the product in direct sunlight. In the event of extremely high temperatures, it may be useful to apply a suitable plastic film to the **DECASTRIP MAX**, in order to prevent the product from drying up.

## Safety information – Transport – Handling and storage - Waste

Consult the most recent and product-related safety information sheet from Rewah in compliance with the (EU) 453/2010 annex II/A guidelines. The information on the abovementioned safety information sheet has been drawn up with the greatest care and is based on the knowledge available at the date of issue. We accept no liability for damage or hindrance of any kind which could be caused by the use of the product concerned.

**Quantity to use**

0,2 – 0,5 ltr/m<sup>2</sup>

**Packaging**

1 ltr and 2,5 ltr and 20 ltr

**Transport and storage**

Transport and store away from frost. Protect the product and its packaging against direct sunlight. Avoid storage at temperatures >30°C.

**Storage life**

6 months after manufacturing in the original closed packaging.

**Considerations**

The data included in this sheet, the application advices and other recommendations are based on extensive research and experience. They are however not binding also in relation to third party liability. They do not protect the customer against checking the products and directions for their suitability for the purpose. The characteristics and properties described are average values and analyses registered at 20°C, variances are tolerated. Our customer service will gladly answer your questions. The rewrite of this sheet replaces all previous sheets.