

MONUCLEAN BF 4 NA EXTERIOR



PEELABLE, ELASTIC ODORLESS CLEANING PASTE FREE OF AMMONIA FOR THE REMOVAL OF DIRT SEDIMENTS, SOOT AND DUST STAINS CONTROLLED BY K.I.K. (letter 5-1-2010). CONTROLLED BY CEBTP (test report C142.3.305.03).

Use

MONUCLEAN BF 4 NA EXTERIOR is used for dry cleaning of dirt sediments, such as dust, earthy sediments, bird droppings, blackening, dense smoke, soot, etc. The product is also effective against superficial stains of soot and dust that have penetrated into the material through moisture. **MONUCLEAN BF 4 NA EXTERIOR** is very suitable for outside cleaning of various substrates, such as brick, concrete and cement-bound artificial stone, limestone, sandstone, chalkstone, glazed brick, marble, plaster, paints, plastics, metal, ... **MONUCLEAN BF 4 NA EXTERIOR** is very suitable for industrial cleaning thanks to its high processing efficiency.

Product description

MONUCLEAN BF 4 NA EXTERIOR is a cleaning paste based on natural rubber free of ammonia with addition of dirt absorbing fillers and chemicals.

Characteristics and properties

During the drying phase, the product forms a film in which the dirt from the substrate is maximally absorbed. After drying, the elastic, dirt-containing film can be peeled off. The **MONUCLEAN BF 4 NA EXTERIOR** process was extensively tested and found suitable by CEBTP. The consistent CEBTP report (test report C142.3.305.03) is available on demand. Also the K.I.K. has supplied a favourable advice (letter 5-1-2010).

Instructions for use

Preparation


In order to assess the product's efficiency, a number of preliminary limited tests have to be carried out on the spots to be cleaned. Stir the product thoroughly before use, prevent air infiltration.

Work method

MONUCLEAN BF 4 NA EXTERIOR can be applied onto the treated surface by using an adapted spraying machine, a brush or a roller. It is necessary to have a minimum layer thickness of 1,0 mm in order to facilitate the removal of the film. Let the product dry until a uniform, transparent film is formed. The formation of the film depends on the ambient temperature and the relative air humidity. As a consequence, drying can last from 2 up to 24 hours or more. After full drying, the film can immediately be peeled off. Maximum waiting time for the peeling of the film is 1 week. In case of cleaning of little porous surfaces such as for instance marble, it is recommended to give these surfaces a subsequent treatment with a wet sponge. Do not apply the product onto heated surfaces and do not expose it to direct heat radiation, given the fact that this will render the film sticky and thus hard to remove. After use, the tools can immediately be cleaned with water to which a small quantity of ammonia has been added. The spraying has to be carried out using an adequate instrument. We are at your disposal to guide and advise you in this matter.

Precautionary measures

The minimum ambient and contact temperature to apply **MONUCLEAN BF 4 NA EXTERIOR** is 10°C. For the cleaning of alkali-sensitive substrates, the presence of a small quantity of alkaline product in the preparation has to be taken into account. Please make sure that the product can't be rinsed off by the rain during the drying process.

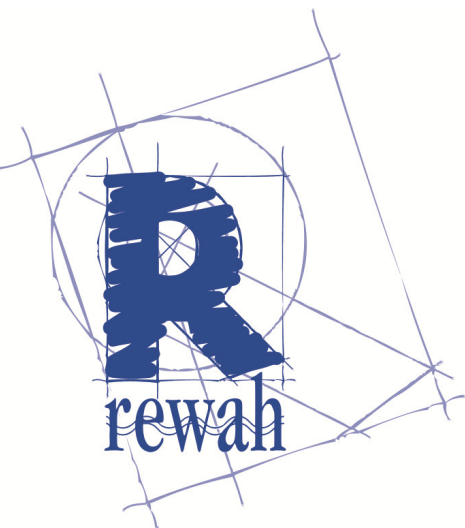

Safety information – Transport – Handling and storage - Waste

Consult the most recent and product-related safety information sheet from Rewah in compliance with the (EU) 453/2010 annex II/A guidelines. The information on the abovementioned safety information sheet has been drawn up with the greatest care and is based on the knowledge available at the date of issue. We accept no liability for damage or hindrance of any kind which could be caused by the use of the product concerned.

Quantity to use

0,25 – 1,00 kg/m² according to the roughness of the substrate

Packaging

4 kg and 15 kg

Transport and storage

Transport and store away from frost. Protect the product and its packaging against direct sunlight. Avoid storage at temperatures >30°C.

Storage life

1 year after manufacturing in the original closed packaging.

Considerations

The data included in this sheet, the application advices and other recommendations are based on extensive research and experience. They are however not binding also in relation to third party liability. They do not protect the customer against checking the products and directions for their suitability for the purpose. The characteristics and properties described are average values and analyses registered at 20°C, variances are tolerated. Our customer service will gladly answer your questions. The rewrite of this sheet replaces all previous sheets.